


CV 9LS.2 Test Bench

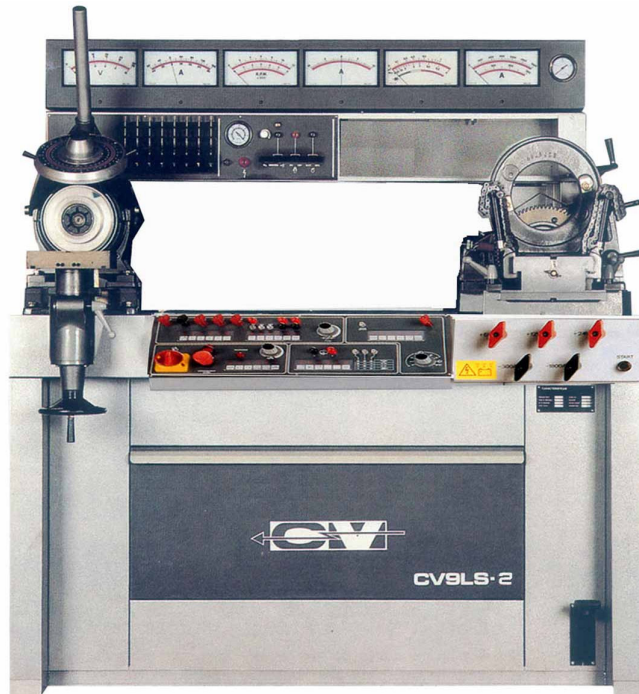

TECHNICAL SPECIFICATIONS:

- Power supply: 220/240/V
- Motor: 5HP
- Hydraulic brake: 15HP
- Vacuum pump: Electric 760/mm.Hg
- Excitation rheostat: 350W
- Variable load: Manual
- Fixed load: 3,3 KW
- Internal coil: 6/12V
- Spark unit Customer Service tester: 8pcs
- Gauge: 0/250 bar
- Generator revolution counter: 0-6.000rpm
- Starter revolution counter: 0-1.500-12.000rpm
- Voltmeter: 0/10/20/40
- Generator load ammeter: 0/80/160
- Alternators excitation ammeter: 10/0/10
- Starter ammeter: 0/300/1.800
- Load indicator lamps: 6/12/24V
- Vacuum meter: -76cmHg.
- Compensation n°RPM: Z=8, 9,10, 11, 12. 13, 14
- HT plug: >10Kv.